


CL Coaxial CCTV Protectors

Novaris Coaxial CCTV protectors are suited to the protection of security and CCTV applications.

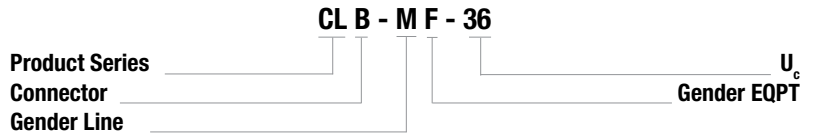

CLB-MF-36

CLB-FF-36

CLB-FM-36

CLF-FF-36



Electrical Specifications		CLB-MF-36	CLB-FF-36	CLB-FM-36	CLF-FF-36
Connection type					Series
Modes of protection					Transverse and common modes
Maximum continuous voltage	U _c				36V
Maximum discharge current (8/20µs)	I _{max}				20kA
Maximum load current	I _L				500mA
Protection stages					Multistage
Voltage protection level @ 5kV (10/700µs)	U _p				40V
3dB frequency					20MHz
Insertion loss					<1dB @ 20MHz

Mechanical Specifications				
Operating temperature / humidity	-40 to +85°C / 0 to 90% non-condensing			
Connector type	BNC		F-type	
Connector orientation (Line / EQPT)	M / F	F / F	F / M	F / F
Environmental	IP 20			
Enclosure / colour	Aluminium / Black			
Weight	100g			

Dimensions				
Width	26mm			
Height	26mm			
Depth	89mm	86mm	86mm	88mm

Standards Compliance
ITU-T K.44
AS/NZS 1768
BS 6651
IEEE C62.41
CP 33
IEC 61643-21
UL497B