

EX20U8-50

**EXCALIBUR POWERLINE SURGE FILTER**

Excalibur powerline surge filters offer class-leading performance and reliability, whether you want to protect your home theatre or hi-fi. Convenient and straightforward to install, plug the product in, and clean, filtered power is now at your disposal, giving you peace of mind knowing that your assets are protected.

Most surge protection power boards only provide a single layer of protection between your valuable equipment and damaging transient signals. The Excalibur powerline surge filter employs a 3-stage surge protection network to provide a premium level of protection.

Display



Excalibur is provided with an LED display showing the electrical parameters of the total connected loads.

All Mode Protection

Protection is provided for all combinations of lines ensuring the maximum level of protection is achieved at all times.

Safe Metal Enclosure

Novaris power protection products are housed in safe, all metal enclosures. In the event of a prolonged overvoltage they will not catch fire or explode.

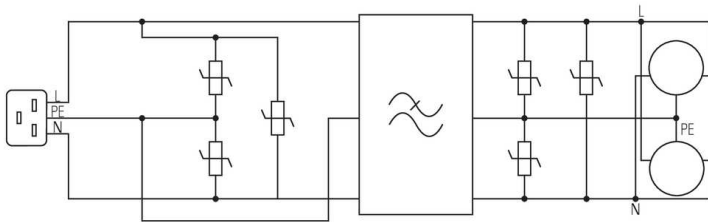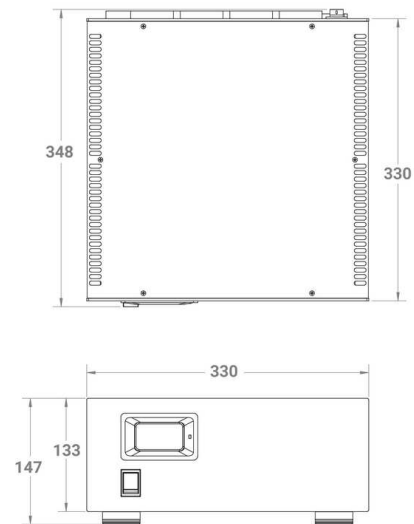



Wiring**Dimensions****Standards**

IEC 61643-11
AS1768
IEEE 62.41.2
UL 1449

SPD connected to low-voltage power systems - Type 1, Type 2
AC power system SPD - Cat B, A
Low voltage SPD - Type 3 (<10m from device)
Low voltage SPD, Cat C (<10m from device)

Product Datasheet

Electrical Specifications

Connection type		Series
Modes of protection		L-N, L-PE, N-PE
Number of ports		2
Number of phases		1
Location		Indoor
Nominal voltage	U_0	230VAC
Short circuit withstand level	I_{SSCR}	25kA
Maximum backup fuse		20A



Electrical (L-N) Specifications

Maximum load current	I_L	20A
Maximum continuous voltage AC	U_c	275VAC
Maximum voltage drop (% of U_0)		<1%
3dB frequency @ 50Ω		<360Hz
Maximum discharge current (8/20 μs)	I_{max}	50kA
Nominal discharge current (8/20 μs)	I_n	20kA
Voltage protection level (3kA 8/20μs)	U_p	<400V
Response time	t_A	Instantaneous
Voltage withstand (5s)	U_T	335V


Electrical (N-PE) Specifications

Maximum continuous voltage	U_c	275VAC
Maximum discharge current (8/20 μs)	I_{max}	50kA
Nominal discharge current (8/20 μs)	I_n	20kA
Voltage protection level (3kA 8/20μs)	U_p	<600V
Response time	t_A	<25ns












Shipping Specifications

Weight		11kg
Customs tariff		85363000, 85363010

Indication Specifications

Display  Digital Screen - Voltage, Current, Power, Energy, Frequency, and Power Factor

Mechanical Specifications

Inlet connection		IEC C19 Socket
Outlet socket options		UK, Australia, USA and Universal
Number of outlets		8
Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		Free standing
Environmental rating		IP20
Enclosure material		Aluminium
Enclosure finish		Powdercoat
Length		330mm
Width		330mm
Height		147mm
Dimensional tolerance		0.5mm

Other Specifications

Product Code		EX20U8-50
--------------	---	-----------

Generated Thu Aug 04 2022